




Simple.
Clean.
Connected.

MiniWash Series

Laundry solution with 1, 2 or 3 pump configurations

MiniWash is a series of compact dispensing systems designed for use with top load or OPL washing machines. The dispensers feature timed mode programming for liquid and dry laundry product applications. Installation is simple and easy using the supplied wall-mounting brackets.

MiniWash provides enclosures that are gasket sealed, providing optimal electronics protection. The units are available in 1 pump single dispenser or 2 and 3-pump dispenser configurations.

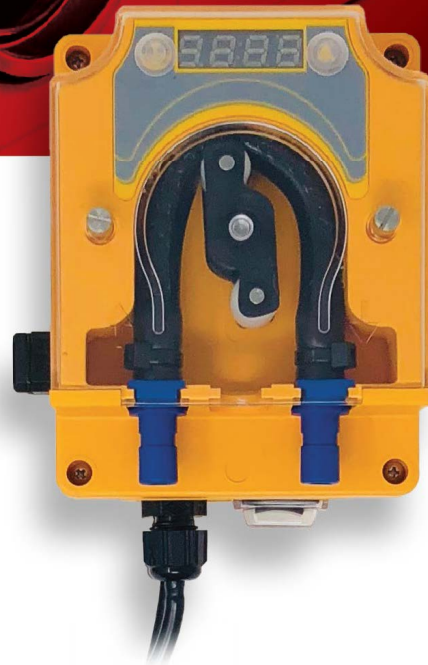

MiniWash 100



MiniWash 200



MiniWash 300

Applications



Education



Hospitality



Healthcare



Industrial



Sport /Fitness

MiniWash Series

Features & Benefits

- Delay time programmability
- Full installation kit included, easy installation
- Water-tight, robust, plastic case
- Reliable Peristaltic Motor
- Simple Start / Stop Programming
- Pump dosing time from 0 to 10 minutes by manual calibration
- Independent pump delay time from 0 to 5 min
- Lock-out time from 0 to 75 minutes
- Optional remote control and low level chemical alarms are available

Specifications

- Power 110-230VAC, 50/60Hz
- Power Consumption: 14W
- Signal input voltage ranges from 20-240VAC
- Flow Rate: 8oz/ min
- Fuse:315mA@250V 5x20
- Nema 4X degree protection enclosure, Class 2 electrical insulation

Equipment Description

