

MiniWash 2 & 3











'BGHF I 7H=CB' / 'CD9F5H=CB'

A5B I 5@


TABLE OF CONTENTS

Safety	2
Circuit Board Diagram	3
Installation	4
Programming Menus	5
Operations	8
Troubleshooting Terms	9
& Conditions	10

SAFETY

-  Follow the instructions in this manual.
-  Check the voltage of the main power source and make sure that it matches one of the three available input voltages (115/208/230 vac) of the transformer inside the MiniWash 2/3.
-  All electrical connections to the MiniWash 2/3 should first be verified with a multimeter. Application of incorrect voltage will permanently damage the unit and is not covered under warranty. Avoid wiring to any power source that has large fluctuations in voltage and/or is prone to surges. Refer to the wiring diagram in this manual for all power and signal connections.
-  For all connections, please refer to the circuit board schematic contained in this manual.
-  Check the model of the equipment you have purchased for the references about installation, setting and programming.
-  **CAUTION:** The MiniWash 2/3 has high voltage connected to the transformer. Always disconnect power when servicing the unit.
-  **CAUTION:** During installation and electrical connections remove all power from the dishwasher.
-  Failure to follow these instructions may lead to personal injury, damage to the product or poor product performance.

Circuit Board Diagram

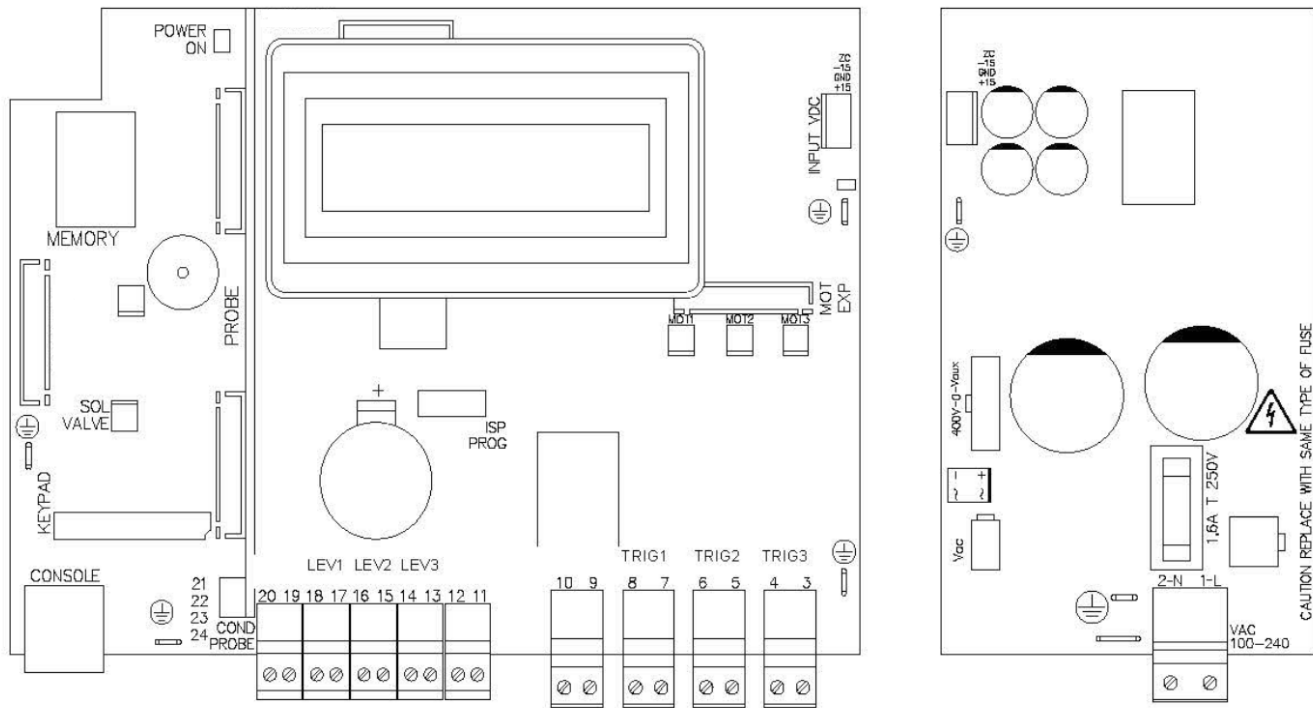

CAUTION!!! Disconnect ALL POWER before installing or servicing the MiniWash.

Function	Description
Main Power (2-N, 1-L)	Connect the main power here. 100-240V tolerance.
Trig 1	Pump 1 / Trigger 1 signal—24-240V
Trig 2	Pump 2 / Trigger 2 signal—24-240V
Trig 3:	Pump 3 / Trigger 3 signal—24-240V
LEV1	Level sensor for pump 1
LEV2	Level sensor for pump 1
LEV3	Level sensor for pump 1

Technical Specs

Description	Specification
Power Input	115/208/230 Vac 50/60 Hz
Signal Input	20-240VAC 50/60 Hz
Power Consumption	14W
Fuse	315mA @ 250VAC 5x20

Installation

-BGH5@@5H-CB'


Mount the unit on a nearby wall (using suitable hardware) of the laundry machine. Locate a mounting spot within no more than 10 feet of the chemical supply. Always install the system at a safe, convenient height for the operators to load or unload solid containers or to perform maintenance.

Check all applicable plumbing and electrical codes before proceeding with the installation. This will help to ensure that the system is installed in safe and suitable manner. A wiring schematic of the laundry machine should be used as reference for making electrical connections this is typically provided by the laundry machine manufacturer if one cannot be located on the machine itself.

AC I BH=B ; 'H<9'GMGH9A'

Apply the panel unit system with the brackets and screws supplied:

- Determine a suitable location for the system;
- Using the bracket as a template, mark and drill holes for bolting the system to the wall;
- Insert the anchors in the holes;
- Bolt the bracket in place with the hardware provided;
- Mount the system with the bracket as the picture below;
- Open the Cabinet Front by unscrewing the upper screws ¼ of a turn:

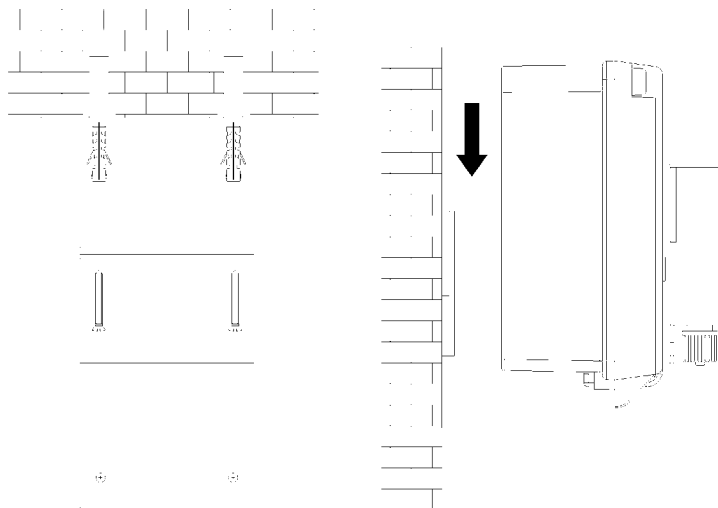


Picture 1

Menus

Programming:


To enter **MENUS**, hold down the ENTER key for 2-3 seconds. Enter your password and press ENTER. Factory default pass-word is 0000. Press Enter. You will have access to set up the dispenser; here is the menu structure.

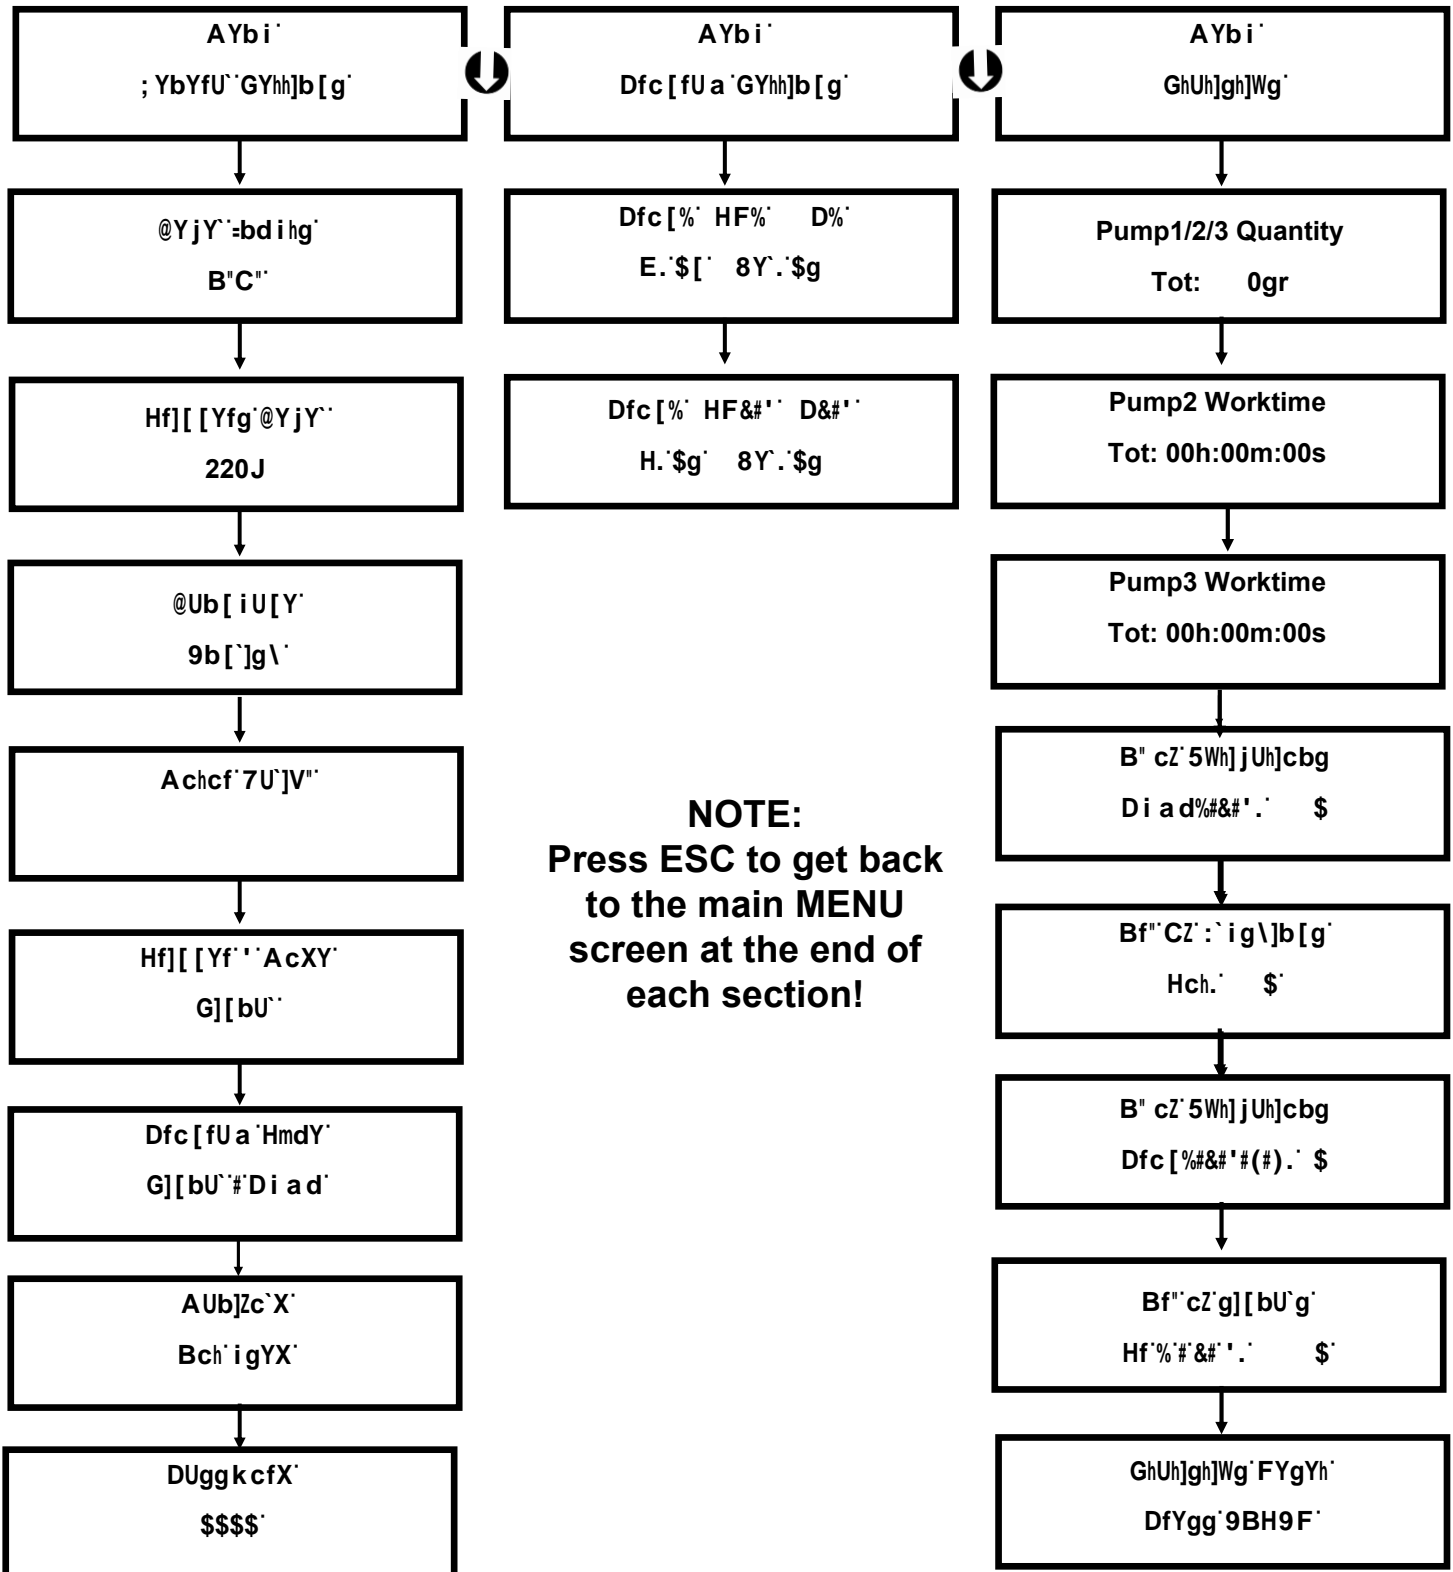

Menu—General Settings

Programming:

To enter **General Settings**, hold down the **ENTER** key for 2-3 seconds. Enter your password and press **ENTER**. **Factory default password is 0000**. Press **Enter**. You will have access to set up the dispenser; here is the menu structure.

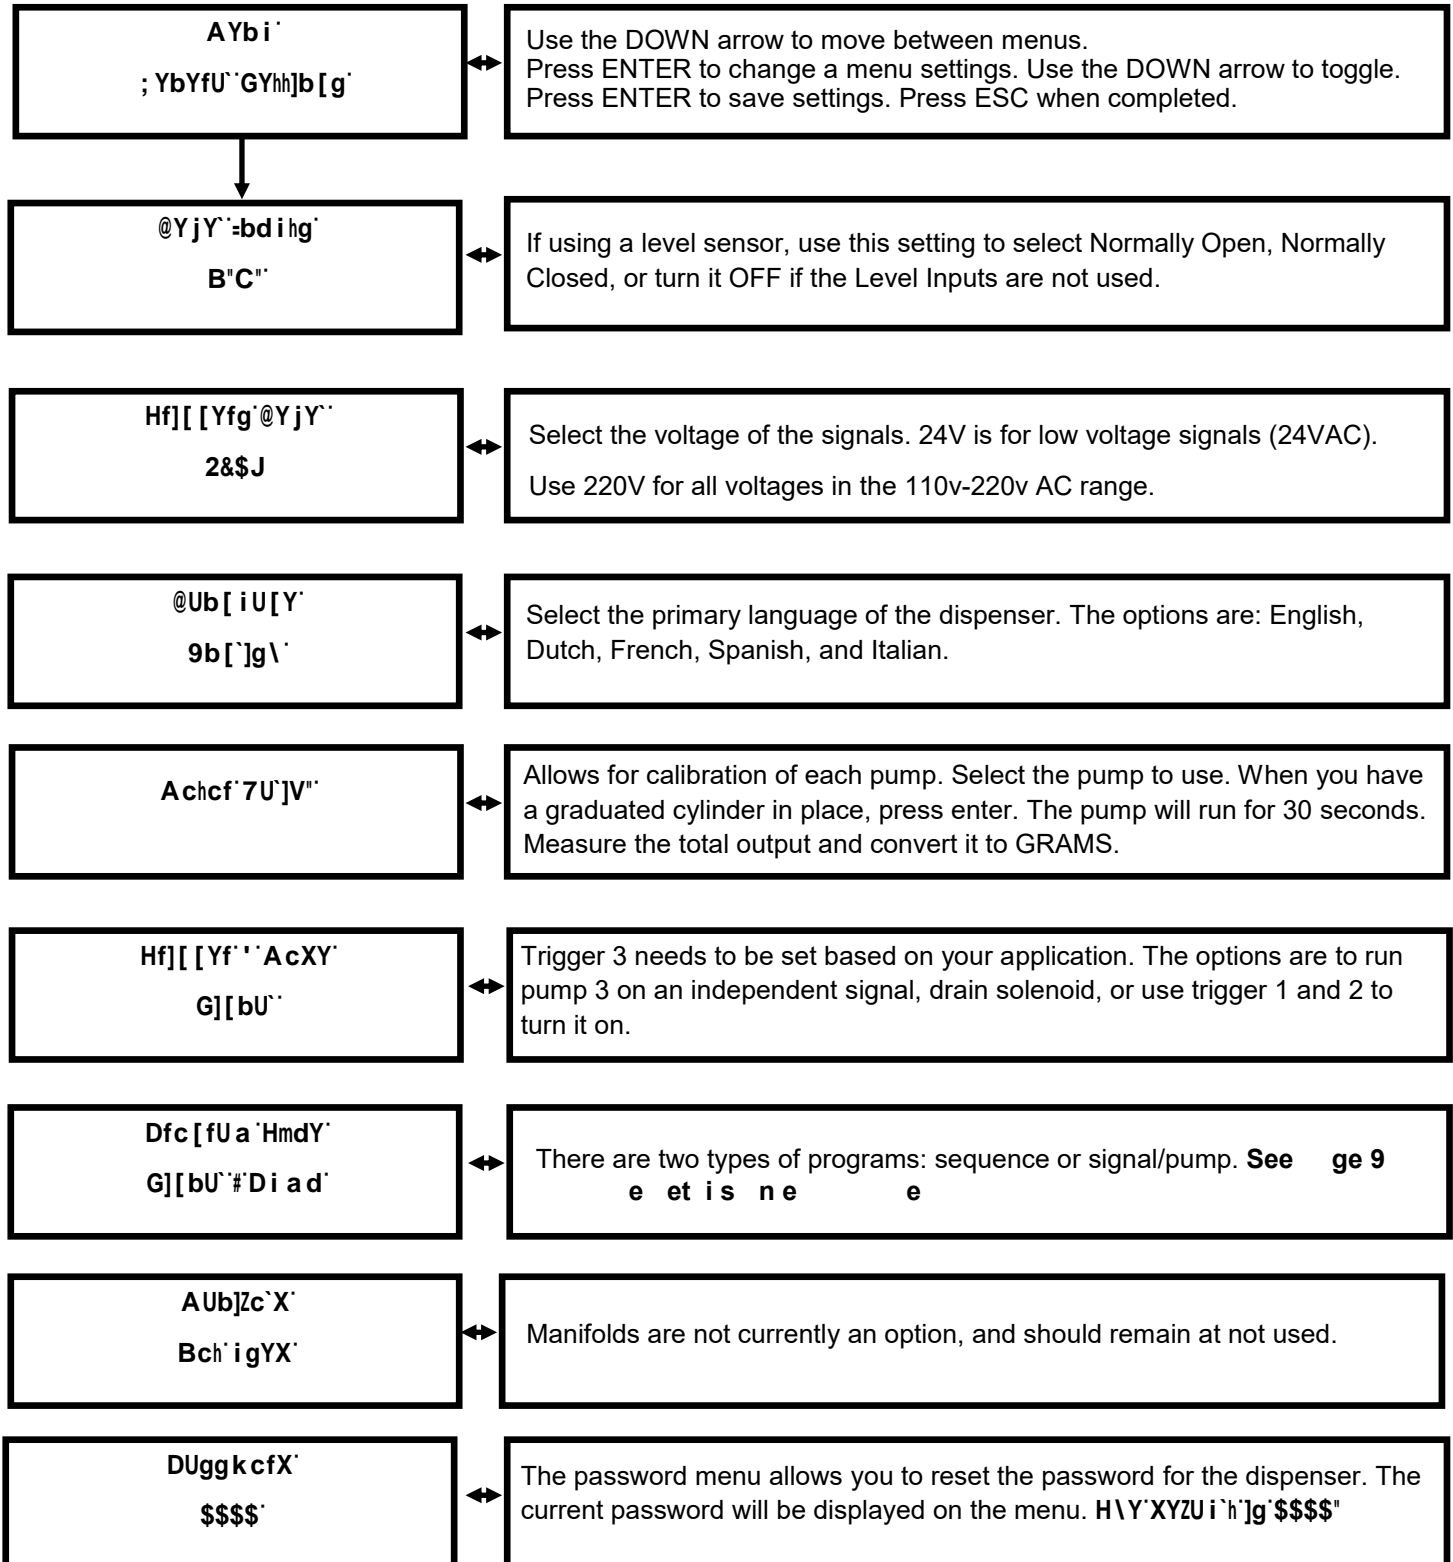

Menu—Program Settings

Programming:

To enter **Program Settings** mode, hold down the ENTER key for 2-3 seconds. Enter your password and press ENTER. **Factory default password is 0000.** Press Enter. You will have access to set up the dispenser; here is the menu structure.

AYbi`
Dfc [fUa`GYhh]b[g`

Use the DOWN arrow to move between menus. Press ENTER to change a menu settings. Use the DOWN arrow to toggle. Press ENTER to save settings. Press ESC when completed.

Dfc [%` HF%` D%`
E.`\$[` 8Y.`\$G`

Use the program settings to set the triggers, pumps, run time, and delay time for each program. There is an option to choose up to 5 programs.

Dfc [%` HF%` D&#`'
H.`\$g` 8Y.`\$G`

Dfc [%` Press ENTER to select the program that needs to be defined. There are 5 program options. Use the RIGHT ARROW to move to the trigger.

HF%` Select the trigger that will be used (1, 2, or 3). Use the RIGHT ARROW to move to the pumps.

D%#&#` Select the correct pump for the signal. NOTE: Pump 1 will have volume entered as a weight (grams), pumps 2/3 will be entered as time. For a quick conversion sheet (grams to ounces) the table to the left.

E.` When you are programming PUMP 1, you will need to enter the QUANTITY (Grams). Use the conversion chart to input the correct ounces.

H.` When you are programming PUMP 2 (P2) and PUMP 3 (P3), you will enter in the QUANTITY (Q) in Grams. See Chart to left for conversion.

8Y.` All 3 pumps have an option for a delay time.

Save all of your settings by pressing ENTER. Finally, press ESC to go back to the main menu.

Conversions:

Grams to Enter	Ounces dispensed
29	1
43	1.5
57	2
72	2.5
85	3
100	3.5
114	4
128	4.5
142	5
156	5.5
170	6
185	6.5
199	7
213	7.5
227	8
241	8.5
256	9
270	9.5
285	10

Menu—Statistics

The **Statistics** menu allows you to measure the performance of your MiniWash dispenser.

<p>Menu Statistics</p>	<p>Use the DOWN arrow to move between menus. Press ENTER to change a menu settings. Use the DOWN arrow to toggle. Press ENTER to save settings. Press ESC when completed.</p>
<p>Pump1/2/3 Quantity Tot: 0gr</p>	<p>The pump 1 quantity tells you the total GRAMS dispensed. To convert from grams to ounces, multiply (grams * 0.035274).</p>
<p>Pump2 Worktime Tot: 00h:00m:00s</p>	<p>Shows the total number of hours/minutes/seconds that pump 2 has been operational.</p>
<p>Pump3 Worktime Tot: 00h:00m:00s</p>	<p>Shows the total number of hours/minutes/seconds that pump 3 has been operational.</p>
<p>N. of Activations Pump1/2/3: 0</p>	<p>For Pumps 1 / 2 / 3, these menus will display the total number of times that the pump has been activated.</p>
<p>Nr. Of Flushings Tot: 0</p>	<p>Flushing does not count at this time because it is not an active feature.</p>
<p>N. of Activations Prog1/2/3/4/5: 0</p>	<p>For programs 1-5, these menus will display the total number of times that the program has been activated.</p>
<p>Nr. of signals Tr 1 / 2 / 3: 0</p>	<p>This counter sums the number of signals received for pump 1, 2 and 3.</p>
<p>Statistics Reset Press ENTER</p>	<p>Using this option will erase the entire dispenser statistics. All functional data will be erased. Proceed with caution.</p>

Operation

There are two types of operational modes. Understanding each mode will determine how you set up your dispenser. The two modes of operation are SIGNAL/PUMP and SEQUENCE.




TWO OPERATIONAL DEFINITIONS:

Signal / Pump: In this mode of operation, the dispenser will pump for each time signal for trigger 1, 2, or 3 are received.

Sequence: In this mode of operation, the signals must go in sequence. For example, signal 1 to pump, than signal 2, then signal 3. In sequence mode, the FINAL pump in operation is automatically the load count pump. I.E. if you're running a 3 pump system, signal 1 and 2 and 3 must activate before the system resets to pump 1/signal 1.

PRIMING THE PUMPS: Hold the UP ARROW (P). Select the pump to prime using the RIGHT ARROW. Press ENTER and the pump will prime for 60 seconds. To escape before the 60 seconds has expired, press the ESC button.

Notable operational symbols:

Symbol	Meaning
	1. The water drop will flash next to the pump number when the pump is dosing.
	1. The hourglass symbol will flash next to the pump number if a delay time is programmed.
	1. The bell symbol will flash next to the pump number when the motor is starting to fail.
P ^L	1. The letter L will flash next to the pump number if there is a level error caused by a level sensor.

Troubleshooting

Problem	Solution
Power Light not turning on	<ol style="list-style-type: none"> 1. Check the fuses on the circuit board. 2. Ensure the power to the circuit board is within range. 3. If the power is within range, make sure your jump is on the correct position.
Pump will not run	<ol style="list-style-type: none"> 1. Check pump output terminals for loose screws and disconnected wires. 2. Check for correct voltage across motor terminals. 3. Check for obstruction in the pump head. 4. If you're activating with a washer signal, make sure there is voltage at the terminal connection.
Too much detergent pumping	<ol style="list-style-type: none"> 1. Check the concentration set point for the correct setting. 2. Re-calibrate the dispenser if the squeeze tube was replaced.
Too little detergent pumping	<ol style="list-style-type: none"> 1. Check the concentration set point for the correct setting. 2. Re-calibrate the dispenser if the squeeze tube was replaced.
Pump runs too slowly	<ol style="list-style-type: none"> 1. Check roller block for binding. 2. Check for proper input voltage (24 VDC applied to the pump motor terminals will result in the highest speeds). 3. Check for lubrication on squeeze tube.
Fuses continues to blow	<ol style="list-style-type: none"> 1. Replace the motor 2. Check the incoming voltage and make sure the jumpers are in

Terms & Conditions

Company warrants its Goods to be free from material defects in material and workmanship for a period of one year except: i. when Goods have been modified following delivery and/or subject to improper handling, storage, installation, operation, or maintenance unless those modifications have been authorized in writing by Seller. ii. when an item is purchased by Company as a component part of the Goods, except to the extent to which such item or items are covered by the warranty, if any, of the original manufacturer. iii. when an item which is a component part of the product has been furnished by Buyer. iv. no warranty of a component part shall extend beyond the warranty period of the device in which such component part is incorporated. b. There is no implied warranty of merchantability or of fitness for particular purpose and there are no warranties of any nature except as set forth in paragraph 3 herein. Any claim by Buyer made pursuant to Company's warranty must be made in writing. Company shall have the right to inspect the Goods claimed to be defective and shall have the right to determine the cause of such alleged defect. All Goods replaced or repaired by Company under its warranty shall be replaced or repaired F.O.B. Company's facility. Buyer must notify Company, in writing, within fifteen (15) days from receipt of Goods of any obvious defect in the product, or shortages, or Company shall have no obligation to correct such defect. Company shall have the option of re-inspection at Buyer's plant or its own before allowing or disallowing Buyer's claim. Defects that do not impair service shall not be a cause for rejection or recovery under any warranty. Buyer assumes full responsibility for the use and application of the product. Buyer accepts Company's design and material selection and specifications in placing this order unless other specifications are agreed to in writing by both parties prior to the manufacture of Goods by Company. Statements and data relating to Products on Seller's literature and website are not intended to define the performance of the product in actual usage or in combination with other equipment or processes. These statements should not be used by Customer solely as an indication of performance or suitability for specific applications or uses.

THE ABOVE WARRANTIES ARE THE SOLE AND EXCLUSIVE WARRANTIES MADE BY SELLER WITH RESPECT TO ALL PRODUCTS AND SERVICES.

Components and spare parts such as O-rings, squeeze tubes, roller blocks and other plastic components are considered to be wear parts and are not warranted. Seller shall have no warranty or liability for product that was damaged during shipment, product that is not being used in its recommended use, product that is not operated in accordance with the operating manual and procedures, product that was not properly installed, product used in a manner that is inconsistent with its designed purpose, product that is subject to a power surge or similar event, products that fail due to usage of a non Lavo Solutions replacement or spare part or product that was not maintained in accordance with recommended maintenance programs.

For full terms and conditions, please visit:
<http://lavosolutions.com/LAVO-T&C-02-2018.pdf>

Lavo Solutions, LLC
Worldwide Headquarters
23192 Verdugo, Suite #D
Laguna Hills, CA 92653

O: 949-377-1250
W: www.lavosolutions.com